

INDUSTRIAL PRODUCTS

2016 CATALOG

DRIVER[®] INDUSTRIAL

Safeguarding Assets & Lives.
Depend on Driver.



Meet Our Brands:



Catalog Index

Page 1	Index	Page 13:	Super Duty Fiberglass Whips Heavy Duty LED Whips
Page 2:	About Driver Industrial®	Page 14:	Metal Whips, Powered Light Duty ATV Whips Light Duty Whips
Page 3:	Wheel Chocks	Page 15:	Telescoping Whips
Page 4:	Wheel Chocks	Pages 16	Hitch Mounts
Page 5:	Vehicle and Equipment ID Panels LED Programmable Numeric, Character	Pages 17	Whip Mount Bases
Page 6:	Vehicle and Equipment ID Panels LED Programmable Numeric, Character Arrow / Message Panels w/ Remote Control	Pages 18	Whip Mounts: Permanent & Temporary
Page 7:	Vehicle ID Panels, Reflective-LED Backlit	Pages 19	Universal Platform Mount
Page 8:	Signal / Status Lights VID Accessories 3 Sided VID Displays	Pages 20	Safety Whip Flags
Page 9	Heavy Duty Fiberglass Whips, Threaded / Non-powered	Pages 21	LED Light Heads for Whips
Page 10:	Heavy Duty Fiberglass Whips, Threaded / Powered	Pages 22	Battery Powered Lights Automotive Lamp Shields
Page 11:	Heavy Duty Fiberglass Whips, Quick Disconnect / Non-powered	Pages 23	Warning Lights
Page 12:	Heavy Duty Fiberglass Whips, Quick Disconnect / Powered	Pages 24	Accessories
		Pages 25	Aviation / Transportation
		Pages 26	Transportation, Personal Protection

Driver Industrial®

2115 W. Mountain View Rd., Phoenix, AZ 85021
Tel. 602-424-2500 Fax: 602-424-9777
Sales@DriverIndustrial.com
www.DriverIndustrial.com

SafetyWhips® Canada

2677 192nd St. #107, Surrey, BC V3Z 3X1
Tel. 604-560-5080 Fax: 604-560-5090
SalesCanada@SafetyWhips.com
www.SafetyWhips.ca



DRIVER
INDUSTRIAL

About Driver Industrial®

Driver Industrial® is a quality manufacturer of market-driven safety products for the mining & commercial industries.

- Privately owned company located in Phoenix, Arizona.
- Founded in May 2004.
- A leading safety and warning whips manufacturer.
- Driver Industrial® turns ideas into successful brands with innovative, market-leading safety products.
- Independent and local ownership provides focus and flexibility needed to achieve success.



Our Mission:

Our mission is to be the preferred and most trusted resource for safety products by exceeding customers' expectations and achieving market leadership.









Our Vision:

We want to earn our customers' loyalty as a Leader committed to never ending improvement in Quality, Productivity, Customer Service, Safety and Environmental Impact.

Our Brands:



Wheel Chocks · General Purpose, Polyurethane

PRODUCT PICTURE	PART #	TIRE SIZE	DIMENSIONS			WEIGHT	GVW (Gross Vehicle Operating Weight)
			L	W	H		
	WC-U0300	35" (88.90cm)	7.5" (19.05cm)	7" (17.78cm)	6" (15.24cm)	2.2 lbs (1.00kg)	10 Ton (20,000lbs)
	WC-U0300-2R <i>Set w/rope</i>	35" (88.90cm)	7.5" (19.05cm)	6.75" (17.78cm)	6" (15.24cm)	5.5 lbs (2.49kg)	10 Ton (20,000lbs)
	WC-U0400	35" (88.90cm)	8.5" (21.59cm)	7.5" (19.05cm)	6.25" (15.875cm)	2.2 lbs (1.00kg)	15 Ton (30,000lbs)
	WC-U0400-2R <i>Set w/rope</i>	35" (88.90cm)	8.5" (21.59cm)	7.5" (19.05cm)	6.25" (15.875cm)	5.5 lbs (2.49kg)	15 Ton (30,000lbs)
	WC-U0500	32" (81.28cm)	10" (25.40cm)	8.5" (21.59cm)	5" (12.70cm)	4.5 lbs (2.04kg)	25 Ton (50,000lbs)
	WC-U0600	40" (101.60cm)	11.5" (29.21cm)	9" (22.86cm)	8.5" (21.59cm)	4.5 lbs (2.04kg)	30 Ton (60,000lbs)
	WC-U0600-2R <i>Set w/rope</i>	40" (101.60cm)	11.5" (29.21cm)	9" (22.86cm)	8.5" (21.59cm)	10 lbs (4.54kg)	30 Ton (60,000lbs)
	WC-U0650	40" (101.60cm)	11.5" (29.21cm)	9" (22.86cm)	8.5" (21.59cm)	6 lbs (2.72kg)	35 Ton (70,000lbs)

PROPER CHOCKING








**POSITION CHOCKS TIGHTLY
AGAINST TIRE TREAD**





Testing & qualification is required for individual vehicle for correct product selection to meet site requirements.

! WARNING

Wheel Chocks · Heavy Equipment, Polyurethane

PRODUCT PICTURE	PART #	TIRE SIZE	DIMENSIONS			WEIGHT	GVW (Gross Vehicle Operating Weight)
			L	W	H		
	WC-UY700	65" (165.10cm)	16.25" (41.28cm)	14.75" (37.47cm)	14.75" (37.47cm)	27 lbs (12.25kg)	70 Ton (140,000lbs)
	WC-UY800	142" (360.68cm)	22" (50.80cm)	15" (38.10cm)	11" (27.94cm)	35.3 lbs (16.01kg)	255 Ton (510,000lbs)
	WC-UY900	165" (419.10cm)	26" (66.04cm)	16.5" (41.91cm)	16.1" (40.96cm)	38 lbs (17.24kg)	400 Ton (800,000lbs)

Wheel Chocks · General Purpose, Rubber

Product Picture	Part #	Tire Size	Dimensions			Weight	GVW (gross vehicle operating weight)
			L	W	H		
	WC-1100BY	N/A	4" (10.16cm)	8" (20.32cm)	4" (10.16cm)	7.5 lbs (3.40kg)	N/A
	WC-1100BY-R2 <i>Set w/rope</i>						
	WC-RB1200	32" (81.28cm)	8.5" (21.59cm)	7.5" (19.05cm)	6.25" (16.51cm)	7 lbs (3.18kg)	6 Ton (12,000lbs)
	WC-RB1200-2 <i>Set of 2</i>						
	WC-RB1200-2R <i>Set w/rope</i>						
	WC-RB1010	32" (81.28cm)	7.5" (19.05cm)	9.5" (24.13cm)	5.75" (14.61cm)	7.4 lbs (3.36kg)	13 Ton (26,000lbs)
	WC-RB1010-2 <i>Set of 2</i>						
	WC-RB1010-2R <i>Set w/rope</i>						
	WC-RB1020	40-44" (101.6-111.76cm)	10" (25.4cm)	8" (20.32cm)	8.5" (31.59cm)	8.5 lbs (3.86kg)	13 Ton (26,000lbs)
	WC-RB1020-2 <i>Set of 2</i>						
	WC-RB1020-2R <i>Set w/rope</i>						

Vehicle & Heavy Equipment, ID Panels, Programmable & RS232 Compatible

Maintenance Free ■ Most Dependable the Industry ■ Bright & Rugged LED Displays ■ Field Tested for over 10 Years



VID-3N12L-A Truck ID in use

- Designed for 24 hour use: the Vehicle ID Display is programmed for brighter illumination in the daytime and a sensor dims the LED output for nighttime use.
- Character VID's can be programmed for all numeric and all 26 alpha characters.
- Once programmed, the numbers or letters use *Locking* technology and do not need reprogramming upon shut down and startup.
- SafetyWhips has built-in *Secure Protection* technology. This insures safe-site operation by preventing VID's from displaying incorrect characters
- Light weight and Easy to mount - VID's can be installed by one technician
- Tough and dependable, SafetyWhips VID's come with a 5 year warranty
- Super-sealed internally as well as externally. SafetyWhips VID's are protected from dirt moisture, high-pressure washing, and vibration. External damage to your VID will not affect its continued operation.
- Available in red, amber, green, blue LEDs.
- Custom color frames available

RS232
Communications
Options



Conveniently change the digits (1 to 9) or *characters (including all letters A - Z), using magnetic switches. They stay set until changed again with the magnet. *on character models only

Numeric Display 9" Character Size, Visible up to 500ft., 24V									
Part Number	LED Color	3 Numeric Characters, LED, Programmable			12 Volt available upon request				
		Digits	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
VID-3N9-24V-R	Red	3	228.6mm 9 in	4.9k 11 lbs	346.7 mm 13.65 in	438.25 mm 17.25 in	12	1.00	12
VID-3N9-24V-A	Amber								
VID-3N9-24V-G	Green								
VID-3N9-24V-B	Blue								
Accessories:	Mounting Brackets VID-S9-2	Power Extension Cord VID-PC-EXT-50-1	Power Cord Splitter 2 VID's VID-PC-EXT9-2Y	Power Cord Splitter 3 VID's VID-PC-EXT9-3Y					


IP Rated

IP66


IP67

available in
120-240/277
VAC


Visible up to 2000 feet



VID-3N9-24V-A



VID-2N12L-R

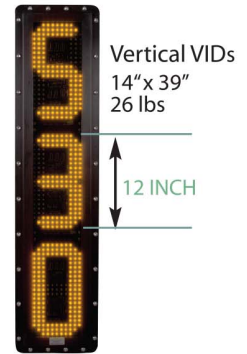

VID-3N12L-A



VID-3C12-B



VID-5C12-A

12 inch Numeric Displays, Programmable 0 to 9

Numeric Display 12" Character Size, Visible up to 500 ft., 24V									
Part Number	LED Color	2 to 4 Numeric Characters, LED, Programmable			12 Volt available upon request				
		Digits	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
VID-2N12L-R	Red	2	304 mm 12 in	7 kg 15.5 lbs	438.15 mm 17.25 in	498.10 mm 19.61 in	24	0.33	8
VID-2N12L-A	Amber								
VID-2N12L-G	Green								
VID-2N12L-B	Blue								
VID-3N12L-R	Red	3	304 mm 12 in	9.3 kg 20.5 lbs	438.15 mm 17.25 in	710.95 mm 27.99 in	24	0.49	12
VID-3N12L-A	Amber								
VID-3N12L-G	Green								
VID-3N12L-B	Blue								
VID-4N12L-R	Red	4	304 mm 12 in	11.2 kg 24.8 lbs	438.15 mm 17.25 in	924.05 mm 36.38 in	24	0.66	16
VID-4N12L-A	Amber								
VID-4N12L-G	Green								
VID-4N12L-B	Blue								
Accessories:	Mounting Brackets VID-S10-2	Power Extension Cord VID-PC-EXT-50-1	Power Cord Splitter 2 VID's VID-PC-EXT12-2Y	Power Cord Splitter 3 VID's VID-PC-EXT12-3Y					

12 inch Character Displays, Programmable A to Z and 0 to 9

Character Display 12" Character Size, Visible up to 500 ft., 24V									
Part Number	LED Color	2 to 4 Numeric Characters, LED, Programmable			12 Volt available upon request				
		Characters	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
VID-2C12-R	Red	2	304 mm 12 in	10.4 kg 23 lbs	438.15 mm 17.25 in	622.05 mm 24.49 in	24	1.0	24
VID-2C12-A	Amber								
VID-2C12-G	Green								
VID-2C12-B	Blue								
VID-3C12-R	Red	3	304 mm 12 in	11.6 kg 25.5 lbs	438.15 mm 17.25 in	899.16 mm 35.40 in	24	1.5	36
VID-3C12-A	Amber								
VID-3C12-G	Green								
VID-3C12-B	Blue								
VID-4C12-R	Red	4	304 mm 12 in	14.1 kg 31 lbs	438.15 mm 17.25 in	1171.95 mm 46.14 in	24	2.0	48
VID-4C12-A	Amber								
VID-4C12-G	Green								
VID-4C12-B	Blue								
VID-5C12-R	Red	5	304 mm 12 in	18.59 kg 41 lbs	438.15 mm 17.25 in	1443.99 mm 56.58 in	24	2.5	60
VID-5C12-A	Amber								
VID-5C12-G	Green								
VID-5C12-B	Blue								
Accessories:	Mounting Brackets VID-S10-2	Power Extension Cord VID-PC-EXT-50-1	Power Cord Splitter 2 VID's VID-PC-EXT12-2Y	Power Cord Splitter 3 VID's VID-PC-EXT12-3Y					

18 inch Character Displays, Programmable A to Z and 0 to 9

Character Display 18" Character Size , Visible up to 1,000 ft., 24V
 1 Character, LED, Programmable 12 Volt available upon request

Part Number	LED Color	Character	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
VID-1C18-R	Red	1	457.2 mm 18 in	7.3 kg 16 lbs	575.31 mm 22.65 in	438.15 mm 17.25 in	24	1.0	24
VID-1C18-A	Amber								
VID-1C18-G	Green								
VID-1C18-B	Blue								

Accessories: Mounting Brackets VID-S18-2 Power Extension Cord VID-PC-EXT-50-1 Power Cord Splitter 2 VID's VID-PC-EXT18/24-2Y Power Cord Splitter 3 VID's VID-PC-EXT18/24-3Y



24 inch Character Displays, Programmable A to Z and 0 to 9

Character Display 18" Character Size , Visible up to 1,000 ft., 24V
 1 Character, LED, Programmable 12 Volt available upon request

Part Number	LED Color	Character	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
VID-1C24-R	Red	1	609.6 mm 24 in	9.5 kg 21 lbs	803.91 mm 31.65 in	438.15 mm 17.25 in	24	1.5	36
VID-1C24-A	Amber								
VID-1C24-G	Green								
VID-1C24-B	Blue								

Accessories: Mounting Brackets VID-S24-2 Power Extension Cord VID-PC-EXT-50-1 Power Cord Splitter 2 VID's VID-PC-EXT18/24-2Y Power Cord Splitter 3 VID's VID-PC-EXT18/24-3Y



36 inch Numeric Displays, Programmable 0 to 9*

Numeric Display 36" Character Size , Visible up to 2,000 ft., 24V
 1 Digit Numeric, LED, Programmable 12 Volt available upon request


Part Number	LED Color	Digit	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
VID-1N36-R	Red	1	914.4 mm 36 in	12.2 kg 27 lbs	1032.51 mm 40.56 in	438.15 mm 17.25 in	24	2.5	60
VID-1N36-A	Amber								
VID-1N36-G	Green								
VID-1N36-B	Blue								

Accessories: Mounting Brackets VID-S36-2 Power Extension Cord VID-PC-EXT-50-1 Power Cord Splitter 2 VID's VID-PC-EXT36-2Y Power Cord Splitter 3 VID's VID-PC-EXT36-3Y



Vehicle ID programmable & dynamic w/communication capability

Arrow Board / Message Board

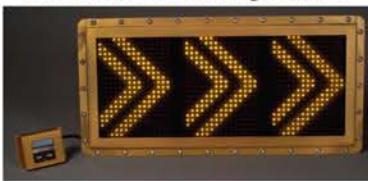

VID-3C12-MBC-24v
 3 Characters
 17.25 x 38 inches
 12V-24V
 Power rating 57W
 28 lbs

Multi-purpose board can be mounted anywhere that directional arrow indicators are required. Additionally, this unit is an integral part of a messaging system on heavy equipment or on stationary structures. The Message Board utilizes the same dependable technology of SafetyWhips' Vehicle ID Displays.

This board can be pre-programmed to display your selected messages regarding Equipment Status, Truck Requires Maintenance, is Down, Not in Service. Also allowing Alternating Use of Arrows for Traffic Guidance along with messages.



RS232
 Communications Options

3-Sided Vehicle Identification Display

Day and Night visible LED Identification Display

Rugged and Real-World Tested

Heavy gauge 1/8" Steel. It's light weight and easy to install. With impact resistance & withstands power hose cleaning. This model is built to withstand extreme vibration. It's black powder coated finish handles maximum environmental protection.

Universal Design Fits:

- 2 Digit VID programmable
- 2 digit VID backlit
- 3 digit VID programmable
- 3 digit VID backlit

Made in the USA

Beacon Light and Whip Available Upon Request

1 VID Per Side With Frame
 VID-3S-BL3N12



Backlit Vehicle ID Panels, Permanent Text

These Panels are Heavy Duty and Weather Sealed, just like our programmable units. The backlit characters are Reflective and Translucent, for day or night visibility, even when not under power. Available in black or amber

available in
120-240/277
VAC

IP Rated

IP66

IP67


Backlit Character Display 18" Character Size, Visible up to 1,000 ft., 24V								
1 Character, Backlit LED								
12 Volt available upon request								
Part Number	Character	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
VID-BL1C18-BK	1	457.2 mm 18 in	6.57 kg 14.5 lbs	575.31 mm 22.65 in	438.15 mm 17.25 in	24	2.08	50
Accessories:	Mounting Brackets VID-S18-2	Power Extension Cord VID-PC-EXT-50-1	Power Cord Splitter 2 VID's VID-PC-EXT18/24-2Y	Power Cord Splitter 3 VID's VID-PC-EXT18/24-3Y				



No Peeling Tape or Broken Numbers!

Backlit Character Display 24" Character Size, Visible up to 1,500 ft., 24V								
1 Character, Backlit LED								
12 Volt available upon request								
Part Number	Character	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
VID-BL1C24-BK	1	609.6 mm 24 in	8.84 kg 19.5 lbs	803.91 mm 31.65 in	438.15 mm 17.25 in	24	3.33	80
Accessories:	Mounting Brackets VID-S24-2	Power Extension Cord VID-PC-EXT-50-1	Power Cord Splitter 2 VID's VID-PC-EXT18/24-2Y	Power Cord Splitter 3 VID's VID-PC-EXT18/24-3Y				

Backlit Character Display 36" Character Size, Visible up to 2,000 ft., 24V								
1 Character, Backlit LED								
12 Volt available upon request								
Part Number	Digit	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
VID-BL1C36-BK	1	914.4 mm 36 in	12.7 kg 28 lbs	1032.51 mm 40.56 in	438.15 mm 17.25 in	24	4.17	100
Accessories:	Mounting Brackets VID-S36-2	Power Extension Cord VID-PC-EXT-50-1	Power Cord Splitter 2 VID's VID-PC-EXT36-2Y	Power Cord Splitter 3 VID's VID-PC-EXT36-3Y				

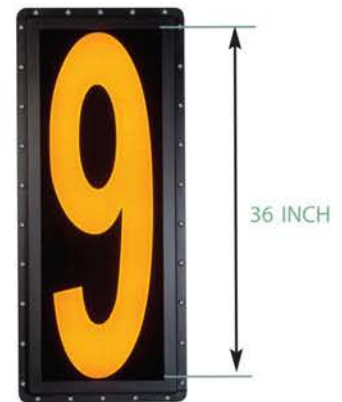

VID-BL1C36

Backlit Character Display 12" Character Size, Visible up to 500 ft., 24V								
2 to 4 Characters, Backlit LED								
12 Volt available upon request								
Part Number	Characters	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
VID-BL2C12-BK	2	304 mm 12 in	9.98 kg 22 lbs	438.15 mm 17.25 in	621.03 mm 24.45 in	24	2.5	60
VID-BL3C12-BK	3	304 mm 12 in	11.34 kg 25 lbs	438.15 mm 17.25 in	895.35 mm 35.25 in	24	3.75	90
VID-BL4C12-BK	4	304 mm 12 in	12.70 kg 28 lbs	438.15 mm 17.25 in	1,169.67 mm 46.05 in	24	5.0	120
Accessories:	Mounting Brackets VID-S10-2	Power Extension Cord VID-PC-EXT-50-1	Power Cord Splitter 2 VID's VID-PC-EXT12-2Y	Power Cord Splitter 3 VID's VID-PC-EXT12-3Y				



VID-BL3C12

Also Available,

as an Economical, Reflective, but non-lit, VID Panel;
in the same type of sealed frame as our standard panels.

VID Accessories

VID Brackets, Pre-Drilled

- Mount to any SafetyWhips VID sign
- Hardware available upon request
- Made of powder coated steel

For 12 inch displays: VID-S10-2
For 18 inch displays: VID-S18-2
For 24 inch displays: VID-S24-2
For 36 inch displays: VID-S36-2



above: VID-S10



PC-EXT-50-1:

50 foot power cord,
two wire and Deutsch connector

PC-EXT-50-2:

50 foot power cord,
Deutsch connector both ends

Signal Lights

These simple, yet versatile signals are in-cab controlled to show equipment or operation status. Weather Resistant.

- Uses Include:**
 Stopped VS Running Status
 Autonomous Operation VS Manned Operation Status
 Ready to Load VS Stop/Do Not Enter

Available as:
 Single or double units
 When in use, panels flash either blue or red or color of choice
 Other colors available.
 Single controller for one or two units.



VID-BL2SIG6-24V-R/B
 Red & Blue signal light shown above

24V Standard, 12V available upon request
 14.5 Watts, 0.6 Amps
 15 lbs
 11 x 35 3/8 inches

available in
 120-240/277
 VAC



IP Rated
 IP66
 IP67

Characters	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Wat
5	304 mm 12 in	18.59 kg 41 lbs	438.15 mm 17.25 in	1443.99 mm 56.58 in	24	2.5	60

VID-5C12-A
 Shown with Signal Light VID-BL2SIG6-24V-R/G

3-Sided VID Displays



VID-LA4NP-SX
 3 or 4 Characters
 LED Backlit w/Reflective sign panels
 3 Magnet-mount feet
 order with or without strobes
 Body Dimensions:
 28" x 28" x 28W 17" H
 12-24 V
 11 lbs

Available without whip or beacon



VID-3PR-KIT-1
 3 Sided Display Kit for One Side Plastic Casing
 Fluorescent Lime Green Reflective Vinyl
 --> Includes black cut vinyl bordering
 --> Polycarbonate size: 11"H x 23"L
 --> 9.25"h lettering, black cut vinyl
 NUMBER: "insert desired numbers/letters here"

PART NUMBERS:
 VID-3PR-KIT-2
 VID-3PR-KIT-3



VID-SA4FA-SX
 Lite Duty for:
 Pick-up or Passenger Vehicle
 12VDC standard
 w/cigarette power cord
 24V available upon request
 20" x 20" x 20W 10" H
 6 lbs



Hitch & Toolbox Mounts:
 VID Display and Flag bolt onto 1/4" Steel Platform.
 Ideal for Ford aluminum body trucks (non-magnetic),
 and an additional mount option for all trucks.
 See page 19 for details.



Non-powered Heavy Duty Fiberglass Whips, Threaded Mount

Whip Height	Single Piece Threaded Whips			Two Piece Threaded Breakdown Whips		
	Whip 11.5x11.5 Mesh Flag	Whip 11.5x11.5 "X" Flag	Whip 16x16 "X" Flag	Whip 11.5x11.5 Mesh Flag	Whip 11.5x11.5 "X" Flag	Whip 16x16 "X" Flag
5ft	W05NP-M	W05NP-SXY	W05NP-XY	W05BDSTNP-M	W05BDSTNP-SXY	W05BDSTNP-XY
8ft	W08NP-M	W08NP-SXY	W08NP-XY	W08BDSTNP-M	W08BDSTNP-SXY	W08BDSTNP-XY
10ft	W10NP-M	W10NP-SXY	W10NP-XY	W10BDSTNP-M	W10BDSTNP-SXY	W10BDSTNP-XY
12ft	W12NP-M	W12NP-SXY	W12NP-XY	W12BDSTNP-M	W12BDSTNP-SXY	W12BDSTNP-XY



W05NP-XY



W08BDSTNP-XY
Breakdown whip shown above.




Whip Extensions Fiberglass Threaded Mount Non-powered


Custom lengths available

Size	Part Numbers
1 ft	EXT-1NP
2 ft	EXT-2NP
3 ft	EXT-3NP
4 ft	EXT-4NP
6 ft	EXT-6NP


Standard Flags



FLAG11-O:
11.5 x 11.5 inch
Orange (PMS 171 C)
Mesh flag



FLAG11-O-XY:
11.5 x 11.5 inch
Yellow (PMS Yellow C)
Mesh flag with reflective yellow X



FLAG16-O-XY:
16x16 inch
Orange (PMS 171 C)
Mesh flag with reflective yellow X

*For other flag options, refer to page 20
Custom sizes available upon request.*



Safety X available in White (W) or Yellow (Y)
For 11.5 x 11.5 or 16x16 inch

Whip Mounts

Non-powered, for Threaded Mount

Steel Thread Mount



Non-Powered Thread mount Optional

519.343NP

Heavy Duty Spring Mounts



Heavy Duty Spring Mount
Highly recommended to help reduce whip breakage.
Non-Powered

a : 519.309NP Stainless Steel
b : 519.30BNP Zinc Plated Steel

Angle Bracket Mounts (ABM)



ABM: Angle Bracket Mount
Attach whips to toolbox, rack or truck bed with this heavy duty bracket.

Hitch Mount



HM1NPA :Hitch Mount with Non-Powered Threaded Mount and 107 dB Backup Alarm

For other mount options see to pages 16 to 19

Powered Heavy Duty Fiberglass Whips, Threaded Mount

Whip Height	Single Piece Threaded Whips			Two Piece Threaded Breakdown Whips		
	Whip 11.5x11.5 Mesh Flag	Whip 11.5x11.5 "X" Flag	Whip 16x16 "X" Flag	Whip 11.5x11.5 Mesh Flag	Whip 11.5x11.5 "X" Flag	Whip 16x16 "X" Flag
5ft	W05-M	W05-SXY	W05-XY	W05BDST-M	W05BDST-SXY	W05BDST-XY
8ft	W08-M	W08-SXY	W08-XY	W08BDST-M	W08BDST-SXY	W08BDST-XY
10ft	W10-M	W10-SXY	W10-XY	W10BDST-M	W10BDST-SXY	W10BDST-XY
12ft	W12-M	W12-SXY	W12-XY	W12BDST-M	W12BDST-SXY	W12BDST-XY




Whip Extensions Fiberglass Threaded Mount Powered Custom lengths available

Size	Part Numbers
1 ft	EXT-1
2 ft	EXT-2
3 ft	EXT-3
4 ft	EXT-4
6 ft	EXT-6


W08BDST-XY Breakdown whip shown above with optional LED whip light

W05-XY with AL8CA


Standard Flags



FLAG11-O:
11.5 x 11.5 inch
Orange (PMS 171 C)
Mesh flag



FLAG11-O-XY:
11.5 x 11.5 inch
Yellow (PMS Yellow C)
Mesh flag with reflective yellow X



FLAG16-O-XY:
16x16 inch
Orange (PMS 171 C)
Mesh flag with reflective yellow X

For other flag options, refer to page 20
Custom sizes available upon request.

Common LED Whip Lights

Product Number					
Flashing	AL8FR	AL8FA	AL8FB	AL8FW	AL8FG
Constant	AL8CR	AL8CA	AL8CB	AL8CW	AL8CG

other flight options available refer to page 21

Whip Mounts

Powered, for Threaded Mount

Steel Thread Mounts



Powered Thread mounts
Optional
a : 519.343.RCA
b : 519.343

Heavy Duty Spring Mounts



Heavy Duty Spring Mount
Highly recommended to help reduce whip breakage.
c : 519.309 Stainless Steel
d : 519.30B Zinc Plated Steel

Angle Bracket Mounts (ABM)



ABM: Angle Bracket Mount
Attach whips to toolbox, rack or truck bed with this heavy duty bracket.

Hitch Mount




HM1A : Hitch Mount with Standard Threaded Mount and 107 dB Backup Alarm

For other mount options see to pages 16 to 19

Non-powered Heavy Duty Fiberglass Whips, Quick Disconnect

Whip Height	Single Piece Quick Disconnect Whips			Two Piece Quick Disconnect Breakdown Whips		
	Whip 11.5x11.5 Mesh Flag	Whip 11.5x11.5 "X" Flag	Whip 16x16 "X" Flag	Whip 11.5x11.5 Mesh Flag	Whip 11.5x11.5 "X" Flag	Whip 16x16 "X" Flag
5ft	SW05QDNP-M	SW05QDNP-SXY	SW05QDNP-XY	SW05QDNP2-M	SW05QDNP2-SXY	SW05QDNP2-XY
8ft	SW08QDNP-M	SW08QDNP-SXY	SW08QDNP-XY	SW08QDNP2-M	SW08QDNP2-SXY	SW08QDNP2-XY
10ft	SW10QDNP-M	SW10QDNP-SXY	SW10QDNP-XY	SW10QDNP2-M	SW10QDNP2-SXY	SW10QDNP2-XY
12ft	SW12QDNP-M	SW12QDNP-SXY	SW12QDNP-XY	SW12QDNP2-M	SW12QDNP2-SXY	SW12QDNP2-XY

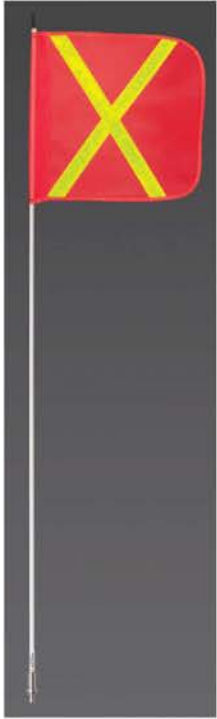

SW05QDNP-XY




SW08QDNP2-XY
Breakdown whip shown above.




Whip Extensions Fiberglass
QD Mount Non-powered
Custom lengths available

Size	Part Numbers
1 ft	EXT-1QDNP
2 ft	EXT-2QDNP
3 ft	EXT-3QDNP
4 ft	EXT-4QDNP
6 ft	EXT-6QDNP


Standard Flags



FLAG11-O:
11.5 x 11.5 inch
Orange (PMS 171 C)
Mesh flag



FLAG11-O-XY:
11.5 x 11.5 inch
Yellow (PMS Yellow C)
Mesh flag with reflective yellow X



FLAG16-O-XY:
16x16 inch
Orange (PMS 171 C)
Mesh flag with reflective yellow X

For other flag options, refer to page 20
Custom sizes available upon request.




Safety X available in White (W) or Yellow (Y)
For 11.5 x 11.5 or 16x16 inch

Whip Mounts

Non-powered, for Quick Disconnect Mount

Steel QD Mounts



Stainless Steel QD Mount
For quick disconnect whips,

SWQDNP: Non Powered

Heavy Duty Spring Mounts



Heavy Duty Spring Mount
Highly recommended to help reduce whip breakage.
Non-Powered

a : 519.309NP Stainless Steel
b : 519.30BNP Zinc Plated Steel

Angle Bracket Mounts (ABM)



ABM: Angle Bracket Mount
Attach whips to toolbox, rack or truck bed with this heavy duty bracket.

Hitch Mount




HMQDNP A: Hitch Mount with Non-Powered Quick-Connect Mount and 107 dB Backup Alarm

For other mount options see to pages 16 to 19

Powered Heavy Duty Fiberglass Whips, Quick Disconnect

Whip Height	Single Piece Quick Disconnect Whips			Two Piece Quick Disconnect Breakdown Whips		
	Whip 11.5x11.5 Mesh Flag	Whip 11.5x11.5 "X" Flag	Whip 16x16 "X" Flag	Whip 11.5x11.5 Mesh Flag	Whip 11.5x11.5 "X" Flag	Whip 16x16 "X" Flag
5ft	SW05QD-M	SW05QD-SXY	SW05QD-X	SW05QD2-M	SW05QD2-SXY	SW05QD2-XY
8ft	SW08QD-M	SW08QD-SXY	SW08QD-X	SW08QD2-M	SW08QD2-SXY	SW08QD2-XY
10ft	SW10QD-M	SW10QD-SXY	SW10QD-X	SW10QD2-M	SW10QD2-SXY	SW10QD2-XY
12ft	SW12QD-M	SW12QD-SXY	SW12QD-X	SW12QD2-M	SW12QD2-SXY	SW12QD2-XY

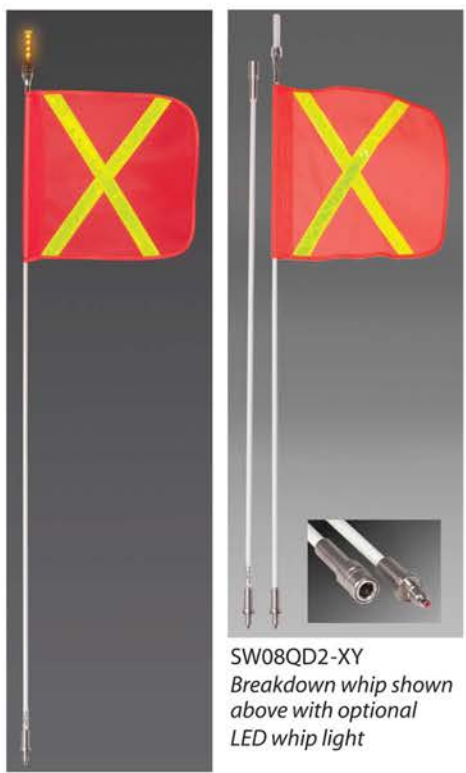


Whip Extensions Fiberglass QD Mount Powered Custom lengths available

Size	Part Numbers
1 ft	EXT-1QD
2 ft	EXT-2QD
3 ft	EXT-3QD
4 ft	EXT-4QD
6 ft	EXT-6QD


SW08QD2-XY Breakdown whip shown above with optional LED whip light

SW05QD-XY with AL8CA


Standard Flags



FLAG11-O:
11.5 x 11.5 inch
Orange (PMS 171 C)
Mesh flag




FLAG11-O-XY:
11.5 x 11.5 inch
Yellow (PMS Yellow C)
Mesh flag with reflective yellow X



FLAG16-O-XY:
16x16 inch
Orange (PMS 171 C)
Mesh flag with reflective yellow X

*For other flag options, refer to page 20
Custom sizes available upon request.*

Common LED Whip Lights

Product Number					
Flashing	AL8FR	AL8FA	AL8FB	AL8FW	AL8FG
Constant	AL8CR	AL8CA	AL8CB	AL8CW	AL8CG

other flight options available refer to page 21

Whip Mounts

Powered, for Quick Disconnect Mount

Steel QD Mounts



Stainless Steel QD Mount
For quick disconnect whips,

- a : SWQD-PT: wire in pigtail
- b: SWQD-R: RCA Type power connector w/ RCA type pigtail,

Heavy Duty Spring Mounts



Heavy Duty Spring Mount
Highly recommended to help reduce whip breakage.

- c : 519.309 Stainless Steel
- d : 519 30B Zinc Plated Steel

Angle Bracket Mounts (ABM)



ABM: Angle Bracket Mount
Attach whips to toolbox, rack or truck bed with this heavy duty bracket.

Hitch Mount



HMQDA : Hitch Mount
with Quick-Connect Mount and 107 dB Backup Alarm

For other mount options see to pages 16 to 19

Super Duty Whips

Added Locked-in Shielding seals components top and bottom.

See yellow Heat Shrink seals in detail photos at right

- 3ft to 12ft heights
- Threaded Base
- Powered
- Optional Flags
- Optional HD Spring

Part# SD05-X-30B-2CA as shown right
(5ft, 16"x16" X Flag, SD Zinc Plated Spring, AL2CA Amber LED Light)



Super Duty Whip Head



Super Duty Whip Base
Optional Super Duty Spring

Super Duty Fiberglass Whips

Product Number Chart

Super Duty (threaded base only)

Height (total)

- 03 (3ft)
- 05 (5ft)
- 08 (8ft)
- 10 (10ft)
- 12 (12ft)

Flag Type

- X (16x16 Reflective X)
- M (16x16 Mesh)

Example shown, SD05-X-30B-2CA
(Super Duty 5', Reflective X Flag, SD Spring Zinc Plated, AL2CA Amber LED)

SD 05 -X- 30B -2C A

LED Light Color
R, B, G, W, A, RA

LED Light Head Type
Leave blank for none
2C (AL2C)
6F (AL6F)
8F (AL8F)

Super Duty Spring Mount
Powered with 12" Fly Lead
Leave blank for none
30B (SD Spring, Zinc Plated)
309 (SD Spring, Stainless Steel)

Heavy Duty LED Whips

SafetyWhips new Heavy Duty LED Whip increases light duty vehicle visibility.

*Other flags are available



WL04A-XY



WL04R-XY



WL04G-XY



WL04B-XY



WL04W-XY

- Available in:
Amber, Blue, Green, White and Red Colors
- Mine-Tough
- Rugged Polycarbonate Protection
- 12v or 24v Surge Protected
- Spring Mounted option for 4 to 8 ft whips
(With spring option easily bends to 90° angle for storage)

Part Numbers	Length
WL04X-XY	4ft
WL06X-XY	6ft
WL08X-XY	8ft
WL10X-XY	10ft

X in part number is for LED Color:
A, R, G, B or W

- Available in:
Amber, Blue, Green, White and Red Colors
- Mine-Tough
- Rugged Polycarbonate Protection
- 12v or 24v Surge Protected
- Spring Mounted option for 4 to 8 ft whips
(With spring option easily bends to 90° angle for storage)

Part Numbers	Length
WL04LX-SXY	4ft
WL06LX-SXY	6ft

X in part number is for LED Color: A, R, G, B or W

Light Duty LED Whips

SafetyWhips new Light Duty LED Whip increases vehicle visibility.



WL04LW-SXY
(Shown with Reflective Flag 11-0-SXY)



Sizes Available

- 1 FT EXT - 1
- 2 FT EXT - 2
- 3 FT EXT - 3
- 4 FT EXT - 4
- 6 FT EXT - 6


Optional Fiberglass Whip Extensions to extend to 8'-12'

Metal Whips – Powered



- Extremely durable ATV Whips
- Up to 7ft
 - 1/4 inch Solid Steel Rod
 - Provides extra flexibility
 - 1156 type Light Socket
 - Black or Red Rod Sheathing
 - Deutsch Connector, Threaded Base
 - Also available in non-powered version

AW07D-X W/AL2CG: (at left)
Red Rod Sheathing, optional Green light head,
optional FLAG-16-X



Red Sheathing cut away to show rod


Light Duty Whips with Window Mount



Light Duty Window Mount, with Pole & Flag
(non-powered only)

LWW05-M: 5ft Light Duty Whip
w / Light Duty Window Mount and Mesh Flag

Light Duty Whips

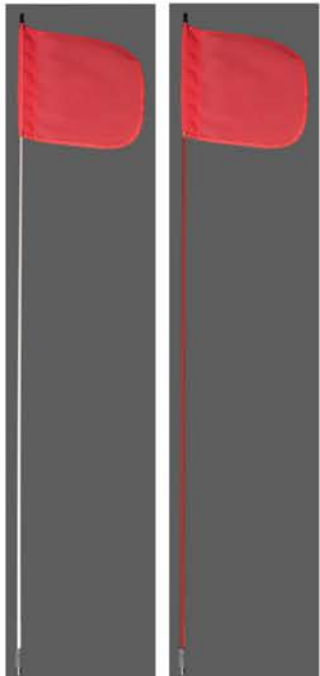

Light Duty Whip:
Available in white or red ,
1/4, 5/16, or 3/8 inch rod and up to 7 feet
shown w/ 11x11 mesh flag

White
ATV250: 1/4 inch rod
ATV308: 5/16 inch rod (far left photo)
ATV375: 3/8 inch rod

Red
ATV250-R: 1/4 inch rod
ATV308-R: 5/16 inch rod (near left photo)
ATV375-R: 3/8 inch rod

Light Duty Whips with Magnet Mount



Magnet Mount with
Light Duty Pole & Flag
non-powered

LWM-BH-100 Magnet cup assembly
OD 4.90" (Pull strength 220lbs)

LWMO5-M: 5ft Light Duty Whip
w / Magnet Mount and Mesh Flag
LWMO7-M : 7ft Light Duty Whip
w / Magnet Mount and Mesh Flag
(page 20 for other flags)

Telescoping Whips, Non-Powered

11 to 21 foot extending lengths



Part Number	Extended	Collapsed
TW11NP-X:	11 foot	79 inches
TW13NP-X:	13 foot	86 inches
TW15NP-X:	15 foot	93 inches
TW21NP-X:	21 foot	110 inches

Telescoping Whips: Whip is constructed of rigid wrapped fiberglass that is safe and non-conductive. Heavy Duty Fiberglass, Non-powered with 3 Locking Sections, Reflective X (16 x16") Flag, *shown at left*



HMTNPA: Hitch Mount for Telescoping Whip w/ Back-up Alarm For Non-powered Whip



TW FMT: Telescopic Whip Flat Mount, w/ whip, locking pin. Non-powered mount, 10" x 10" flat plate with TW sleeve welded center, Powder Coated Black. Designed for applications when a hitch mount is not available.



4 mounting bolt holes 5/16, 1/4 inch Steel Plate, and weighs 7.8 lbs .

Side Extended Hitch Mounts and Back-up Alarm versions are on page 16

Telescoping Whips, Powered

11 to 21 foot extending lengths



Part Number	Extended	Collapsed
TW11D-X:	11 foot	79 inches
TW13D-X:	13 foot	86 inches
TW15D-X:	15 foot	93 inches
TW21D-X:	21 foot	110 inches

Telescoping Whips: Whip is constructed of rigid wrapped fiberglass that is safe and non-conductive. Heavy Duty Fiberglass, Powered with 3 Locking Sections, Reflective X (16 x16") Flag, *shown at left*

(at right, shown in down position)
Telescoping Whips mounted in our
HMTD: Hitch Mount for Telescoping Whip
Also shown at lower right



TW FMT: Telescopic Whip Flat Mount, w/ whip, locking pin. Non-powered mount, provides access to Tele-whip's RCA power input. 10" x 10" flat plate with TW sleeve welded center, Powder Coated Black. Designed for applications when a hitch mount is not available.



4 mounting bolt holes 5/16, 1/4 inch Steel Plate, and weighs 7.8 lbs .

Side Extended Hitch Mounts and Back-up Alarm versions are on page 16



HMTDA: hitch mount for Telescoping Whip with 7-Way power plug, Deutsch connector and Back-Up Alarm

Hitch Mounts, powered

Non-Powered Hitch mounts are available



Hitch Mounts are available with either a screw mount for the standard threaded whip, a quick release mount for quick connect whips or a telescoping adapter for telescoping whips and Breakdown Whips. **Specify 2 inch or 1.25 inch receiver.** Order with or without a 107 dB backup alarm.



hitch pin, optional part



HM1: Hitch Mount with Standard Screw Mount



HMQD: Hitch Mount with Quick-Connect Mount



HMTD: Hitch mount for Telescoping Whip with 7-Way power plug and Deutsch connector.



HM1S: Hitch Mount with Standard Screw Spring Mount
*107 db Backup Alarm available



HM1A: Hitch Mount with Standard Screw Mount and 107 dB Backup Alarm



HMQDA: Hitch Mount with Quick-Connect Mount and 107 dB Backup Alarm



HMTDA: Hitch mount for Telescoping Whip with 7-Way power plug, Deutsch connector and Back-Up Alarm

Extended Hitch Mounts, powered

Non-Powered Hitch mounts are available

Extended Hitch Mounts allow you to use your vehicle's hitch receiver for warning whips while still being able to utilize your tailgate or rear hatch when necessary. Extended hitch mounts are available for solid fiberglass warning whips and for Telescoping Whips. **Mount only available for 2" or larger hitch receivers.**



HML1: hitch mount for threaded whip with 7-Way power plug



HML1A: hitch mount for threaded whip with 7-Way power plug and Back-Up Alarm



HMLQD: hitch mount for Quick Disconnect whip with 7-Way power plug



HMLQDA: hitch mount for Quick Disconnect whip with 7-Way power plug and Back-Up Alarm



HMLTD: Hitch mount for Telescoping Whip with 7-Way power plug and Deutsch connector.



HMLTDA: Hitch mount for Telescoping Whip with 7-Way power plug, Deutsch connector and Back-Up Alarm

Whip Mount Bases

Threaded Whip Receiving Mounts



- Steel Thread Mounts**
- a : 519.343NP Non-powered
 - b : 519.343.RCA RCA Type power connector w/ RCA type pigtail
 - c : 519.343 wire in pigtail

Quick Disconnect Receiving Mounts



- Stainless Steel QD Mount**
Use with quick disconnect whips
- d : SWQDNP: Non-powered
 - e : SWQD-PT: wire in pigtail
 - f : SWQD-R: RCA Type power connector w/ RCA type pigtail



Heavy Duty Spring Mount
Highly recommended to help reduce whip breakage.

*Shown with:
ABM: Angle Bracket Mount
See page 18*

Powered:

- g : 519.309 Stainless Steel
- h : 519.30B Zinc Plated Steel



Non-powder

- i : 519.309NP Stainless Steel
- j : 519.30BNP Zinc Plated Steel



Whip Mount Thread to QD Adapters

Thread to Quick Disconnect Adapters:
For use converting 1/2 inch 20 thread whip connection to QD
Available as Adapter Only or in Kit with Receiving QD Mount

Non-powered



- k : SWQD-KIT-NP, (kit)
- l : SWQD-WA-NP (adapter only)

Powered w/ lead



- m : SWQD-KIT-PT (kit)
- n : SWQD-WA (adapter only)

Powered w/detachable RCA lead



- o : SWQD-KIT-R (kit),
- p : SWQD-WA (adapter only)

Permanent Whip Mounts



519.821:
cigarette cord power adapter ships w/ Powered Magnet Mounts. Available as a separate part.



ABM: Angle Bracket Mount
Attach whips to toolbox, rack or truck bed with this heavy duty bracket.



FSM: Universal Flat Surface Mount



FDSM in Up position



Down position

FDSM: Fold Down Mount
Attaches whips to the truck side wall, tool box or back rack. It provides a quick and efficient way to fold whips down when leaving a job site or passing under low overhangs.

New Item!



FDVM Side Wall Mount
NEW – Side Wall Mount
Great for panel trucks and vans. Allows whip fold down to right or left
Whips up to 12 Ft
Use with RH01 Whip Retaining Hook (on page 24)

Temporary Whip Mounts



w/Quick-Disconnect

Medium Duty Magnet Mount
519.33LHR (red) Magnet mount, powered
A Quick-Release Mount is a typical option when ordering a Powered Magnet Mount.
Whips up to 8 Ft



519.33LRNP
non powered



519.33LHRNP
non powered



519.33LR
powered

519.33LHR
powered



Heavy Duty Magnet Mount
519.330
Shown with optional cigarette cord power adapter.
Whips up to 12 Ft



SPM: Stake Pocket Mount
Attach whip to this mount after slipping it into a truck's post hole and expanding the base.

Shown at left, Heavy Duty Aluminum, no drilling needed, a solid fit with adjustable base plates.



SW: Plate Mount
Steel Plate Mount for Non-Magnetic Applications
Allows use of magnetic warning lights, whips and other magnetic devices. Heavy Duty, flush-mounted plate with solid adhesive ensuring maximum security (easy to install).



519.320-V: Window Mount
Shown with optional cigarette cord power adapter.
Whips up to 8 Ft

Universal Platform Mount Systems

*Ideal for Ford aluminum body trucks (non-magnetic)
& all trucks as an alternative mounting location*



Magnetic Based Strobe & Whip

UPMT : Toolbox/Side Wall Mount
for Vertical Pole

Universal Platform Mount

Powder coated steel surface holds magnetic strobes and mounting holes allow devices to be bolted directly to the platform.



3 Sided Display & Whip bolted onto powder coated Universal Platform

- Use for VID Display (bolt on) & flag
- Magnetic based strobe & flag.
- Other accessories
- Side Wall or Hitch Mount Options



Hitch Mount options




For Hitch Mounting:
Order the hitch mount receiver separately,
HMTD, HMTDA, HMLTD (extended) or
HMLTDA (extended) as needed.

UPM5	5' Pole with Powered Triangle Platform
UPM5-TM	5' Pole/Platform with Thread Whip Mount
UPM5-S	5' Pole/Platform with Thread Whip Mount and strobe
UPM5-V	5' Pole/Platform with Thread Whip Mount and 3-sided Display
UPM5-VS	5' Pole/Platform with Thread Whip Mount, strobe and 3-sided Display
UPM5-QD	5' Pole/Platform with QD Whip Mount
UPM5-QDS	5' Pole/Platform with QD Whip Mount and strobe
UPM5-QDV	5' Pole/Platform with QD Whip Mount and 3-sided display
UPM5-QDVS	5' Pole/Platform with QD Whip Mount and 3-sided display and strobe
UPM3	3' Pole with Powered Platform
UPM3-TM	3' Pole/Platform with Thread Whip Mount
UPM3-S	3' Pole/Platform with Thread Whip Mount and strobe
UPM3-V	3' Pole/Platform with Thread Whip Mount and 3-sided Display
UPM3-VS	3' Pole/Platform with Thread Whip Mount and 3-sided Display with strobe
UPM3-QD	3' Pole/Platform with QD Whip Mount
UPM3-QDS	3' Pole/Platform with QD Whip Mount and Strobe
UPM3-QDV	3' Pole/Platform with QD Whip Mount and 3-sided display
UPM3-QDVS	3' Pole/Platform with QD Whip Mount and 3-sided display with strobe
UPMT	Side Mount for Telescoping Whips and Platform Mounts

Flags

Mesh Pennant Safety Flag / Including Hog Rings
 UV Resistant, Anti-Microbial and Fray Resistant *12w x 9h inch flags*

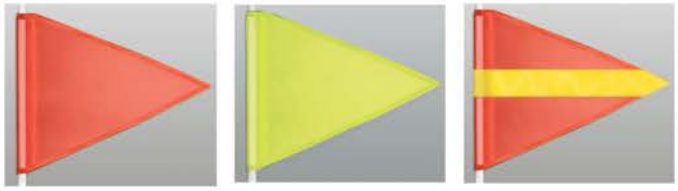

FLAG-PO: Orange
FLAG-PFY: Fluorescent Yellow
Flag-PO-SY: Orange Yellow 3M Stripe

Mesh Safety Flag with Reflective X / Including Hog Rings x2
 UV Resistant, Anti-Microbial and Fray Resistant *16w x 16h inch flags*



FLAG16-O-XY: Orange reflective X in yellow
FLAG16-Y-XW: Fluorescent Yellow reflective X in white
FLAG16-O-XW: Orange reflective X in white

Mesh Safety Flag with Reflective X / Including Hog Rings x2
 UV Resistant, Anti-Microbial and Fray Resistant *11.5w x 11.5h inch flags*



FLAG11-O-XY: Orange reflective X in white
FLAG11-O: Orange reflective X in yellow
FLAG11-M: Orange



Windsock and Hardware
Flag-WS18-96: Flag, 18x96, other lengths available



Flag-WS18-HW: (Hardware)




Light Duty Windsock
FLAG-WS8-19: Flag,

Airport Checkered Flag
Flag-APF: 36"x36"
 Heavy-duty Nylon Airport Flag



Custom Flags Available

Standard Flag Colors:

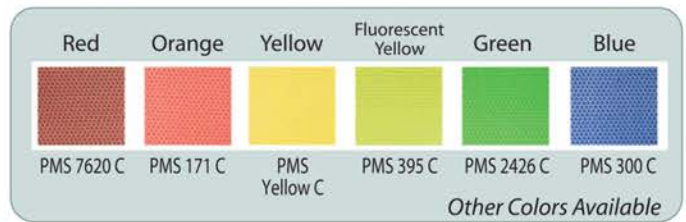

Other Colors Available

*PMS Colors - based on Pantone Matching System®



Reflective Whip Sleeve
FLAG-RS24: 24 inch length
FLAG-RS36: 36 inch length
FLAG-RS59: 59 inch length




Metal "Flags":
 Rigid, location flags can be decal'd as needed.
Shown on whip at left

LED Whip Lights

Mine Specification

24 Volt LED lights are available.

AL6FX: 6 LED Light Tubes 12V Animated

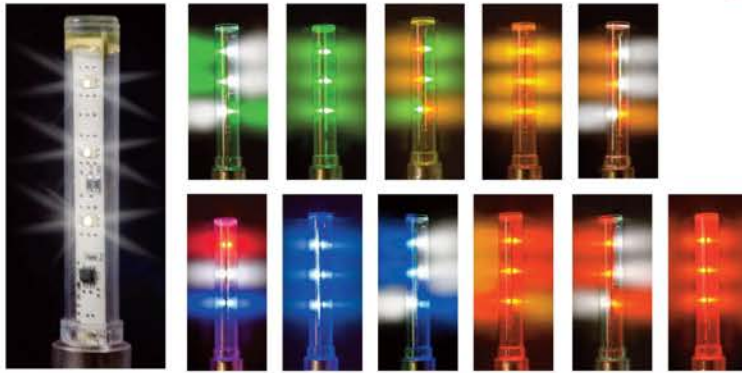

DAY / NIGHT VISIBILITY

- AL6FX:**
Added Features
- Strobing LED Light
 - Visible **Night or Day** and from Miles Away
 - 192 lumens brightness
 - Cross-QuadFlash
 - Fits 1156 (BA) Sockets

BRIGHTEST AVAILABLE WHIP LIGHT
192 lumens

White: AL6FW, Green-White: AL6FGW, Green: AL6FG, Amber-Green: AL6FAG, Amber: AL6FA, Amber-White: AL6FAW, Red-White-Blue: AL6FRWB, Blue: AL6FB, Blue-White: AL6FBW, Amber-Red: AL6FAR, Red-White: AL6FRW, Red: AL6FR

AL8FX: 8 LED Light Tubes 12V Animated



- Preprogrammed with 7 flash patterns for high visibility
- Durable and weather resistant
- LEDs rated to 100,000 hours
- Fits 1156 (BA) Sockets

Red: AL8FR, Blue: AL8FB, White: AL8FW, Green: AL8FG, USA: AL8FR-W-B-R, Multi-color R,G,B,A: AL8FMULTI



AL8CX: 8 LED Light Tubes 12V Non-Flashing



Red: AL8CR non-flashing
 Amber, Red: AL8CAR non-flashing
 Amber: AL8CA non-flashing

AL2CX: 2 LED Light Tubes 12V Non-Flashing

Low Profile

Low Profile Super Bright 12V 4x Brighter than Standard 8LED lights!

These Super Brights stay warm enough to melt snow and ice.



AL2CR Red non-flashing
 AL2CG Green non-flashing
 AL2CB Blue non-flashing
 AL2CA Amber non-flashing
 AL2CW White non-flashing
 AL2CAR Amber, Red non-flashing

- This tough light is completely filled with optically clear gel for added robustness.
- 2-LEDs, Non-Flashing
- 100,000 Hours
- Extra bright
- Available in 5 colors and Red/Amber
- Fits 1156 (BA) Sockets

AL4CX: 4 LED Light Tubes 12V Non-Flashing



- 360 degree,
- Bi-directional
- Available in amber, (left) also red, white, blue & green
- Fits 1156 (BA) Sockets

AL16FX: 16 LED Light Tubes 24V Animated



- Advanced Circuitry
- 24 Volt Input
- 16 LED, 8 per side
- Fits 1156 (BA) Sockets
- Weather resistant in Polycarbonate Tubing
- Available in red, (shown at left) also, amber, green & white
- "X"= A,R,W,G Color

24V

LED Whip Lights

LED Whip Light Part Number Matrix

Product Number *example* **AL8** **F** **R**

Light Type

- AL8:** Standard Night Visibility Flashing (F) or Constant (C)
- AL6:** Low Profile, Super Bright Flashing only (F)
- AL2:** Low Profile, Super Bright Constant (C), Non-flashing only

Flash or Constant

- F:** Flashing
- C:** Constant

LED Colors

- A:** Amber
- B:** Blue
- G:** Green
- R:** Red
- W:** White
- AR:** Amber/Red
- USA:** Red/White/Blue*
- MULTI:** Red/Green/Blue/Amber**

* USA not available in AL2 type
** Multi not available in AL2 or AL6 types

Custom options available

Battery Powered Options



9 VOLT BATPACK: Use for a great temporary alternative to hard-wiring your whip. An excellent back-up power supply for your AL8F of whip-top lights
Expected hour of use:
With AL8F-CLED, 25 to 30 hours



BATPACK-ER KIT: The BatPack-ER Kit, fits an existing 1156 socket whip or use set-screw base. It can also be used as a temporary light source in lieu of wiring. Includes both base options, the 3 CR2 3 V batteries, and AL8F light (in your choice of color).



Lamp Shields

Lamp Shields: High impact plastic to protect Automotive Type Bulbs on whips and changes color.

Lamp Shields, full cover: High impact plastic to protect Automotive Type Bulbs on whips and changes color.



HELIOS

WARNING LIGHTS

10 YEAR
PRO-RATED
LIMITED
WARRANTY

Medium Profile Beacons/Low Profile LED Minibars

Specs at a Glance



HE-B250V-A | Vacuum Magnetic Mount



HE-B250M-A | Magnetic Mount



HE-B250P-A | Permanent Mount

SMART BEACONS

"STANDARD" OPTIONS AVAILABLE
HE-B200M-x
HE-B200V-x
HE-B200P-x
x= Color

- Battery Alert
- Auto Dimmer
- Synchronization
- 10 Year Warranty
- Zero EMI (B250M Series)
(No radio interference)

FEATURES:

- Smart Device Master/Slave synchronization system up to 16 lights Battery Alert alerts you to critically low battery voltage
- Auto Dim technology with photocell for night time use
- "Zero EMI" by design (No radio interference) (B250M Series)
- Adaptive thermal management for maximum colour stability & light output (no red shifting)
- Fully encapsulated electronics for rugged durability against vibration and moisture
- Auto Dim and Synchronization not available in Magnetic Mount versions

Specifications:

Voltage	12-125VDC*	12-125VDC*	12-125VDC*
Peak Current Draw	0.5 Amps*	0.5 Amps*	0.5 Amps*
SAE Class	SAE J845 Class 1	SAE J845 Class 1	SAE J845 Class 1
Flash Patterns	13	13	13
Mounting	Magnetic	Vacuum Magnetic	Permanent

*12-48VDC for Magnetic or Vacuum Magnetic Models
*0.3-0.4 Amps for Magnetic or Vacuum Magnetic Models



Available Lens Colors: A B C G R P

"STANDARD" OPTIONS AVAILABLE
HE-M600V-x
HE-M600M-x
HE-M600P-x
x= Color

- Battery Alert
- Auto Dimmer
(Not available on Magnetic Mount versions)
- Synchronization
(Not available on Magnetic Mount versions)
- 10 Year Warranty
- Zero EMI
(No radio interference)

LOW PROFILE HIGH INTENSITY LEDS

FEATURES:

- NEW 90 LED configuration
- TRU360°: brightest output, low amp. usage
- Smart Device Master/Slave synchronization system up to 16 lights
- Battery Alert alerts you to critically low battery voltage
- Auto Dim technology with photocell for night time use
- "Zero EMI" by design (No radio interference)
- Adaptive thermal management for maximum colour stability & light output (no red shifting)
- Fully encapsulated electronics for rugged durability against vibration and moisture
- Premium optics, extruded aluminum base with T-slot mounting and polycarbonate outer dome



HE-M650P-CA | Permanent Mount




HE-M650M-AC | Magnetic Mount



HE-M650V-CC | Vacuum Magnetic Mount

Specifications:	
Voltage	12-24VDC*
Peak Current Draw	0.8-3 Amps*
SAE Class	SAE J845 Class 1
Flash Patterns	23
Mounting	Permanent/Magnetic/Vacuum Magnetic

*12-48VDC for Magnetic or Vacuum Magnetic Models
*0.3-0.4 Amps for Magnetic or Vacuum Magnetic Models



SMART MINIBARS

Accessories



a: RCA.1: Dual-wire, Right angle Plug
 b: RCA.2: Dual-wire, Straight Plug
 c: HP.2: Single-wire, Hot Plug



RCA.D :
Deutsch DT Series 2 pin connector.
 This Dual-wire connector offers extra protection in harsh environments



HM-TRAILER PLUG:
 Pollak 7-Way Trailer End Plug



d: TWMD
 e: TWFD
Deutsch DT Series 2 pin connector.
 RCA to Deutsch Adapters



HM-B/U-alarm 107db
 Backup Alarm, 107db
 This compact, high sound level alarm is specifically designed for 107 decibels. This solid state alarm is polarity protected. The 270 alarm has an approximate current draw of 0.5 Amps. Self-resonating circuitry automatically adjusts to environmental conditions to ensure a constant 107 decibel output. Weight: 12 oz. (340 g)



519-DC/DC converter:
 24 to 12 Volt DC Converter



519.821: cigarette cord 10 ft., power adapter



RH01 Hold-down Hook
 Hold-down hook for Fiberglass Whips



First Aid and Body Fluid Clean-up Kits



First Aid Kit for 10 persons
 Plastic Adhesive Strips, Bandages, Gauze Pads, Gauze Bandage, Adhesive Tape, Antiseptic Towelettes, Aid/Burn Cream Packets, Bandage Scissors, Forceps, Gloves, First Aid Guide

FA-10P



Body Fluids Clean-up Kit

FA-BP



First Aid Kit for 25 persons
 This industrial First Aid Kit is designed for a 25-person workplace meeting OSHA requirements but also ideal for any office or home. The compact metal case is easily transportable with convenient handle and easily stowable or wall-mountable. Cold-pack, Plastic Adhesive Strips, Bandages, Gauze Pads, Gauze Bandage, Adhesive Tape, Antiseptic Towelettes, Aid/Burn Cream Packets, Gloves, First Aid Guide, medical scissors and tweezers,

FA-25P

Aviation / Transportation Safety



Windsock and Hardware

Flag-WS18-96: Flag, 18x96 ,other lengths available Flag-WS18-HW: (Hardware)

Airport Checkered Flag
Flag-APF: 36"x36"
 Heavy-duty Nylon Airport Flag



Light Duty Windsock
FLAG-WS8-19: Flag,



WC-1100BY-R2 2 roped chocks	
4 L • 8 W • 4 H in	7.5 lb
10.16 L • 20.32 W • 10.16 H cm	3.40 kg



Snow plow whip



HD Fiberglass Whip with HD Spring, show at left. see specifications on page 12

Fire Hydrant Mount

FHM: Fire Hydrant Mount
 Find Hydrant in deep snow and avoid over-plowing and drive overs

3M Scotchlit™ Diamond Grade™

This reflective prismatic sheeting offers optimum visibility for the backs and sides of trucks. This Prismatic effect produces a high visibility from multiple angles.

3M Conspicuity Tape, DOT marking for vehicles and signage.

- 7 year warranty not to fade, crack, peel or discolor.
- Meets NHTSA Regulations 49 CFR 571.108 and FHWA 49 CFR 393.13
- Reflects up to 900 candlepower brightness
- Precut alternating color sections for easy application
- Superior visibility from all angles

TAPE-2-RW: Adhesive, Red and White, also available in other colors

TAPE-2M-G: Magnetic, Green, also available in other colors

- Magnetic or adhesive
- Single or Multi-Color
- 50' or 150' rolls
- 1 to 4 inch width



Road Hazard Kit



Features: 3-Safety triangles with bases
 Fluorescent strips provide maximum warning day or night
 Reflectors sealed from dust & moisture,
 Plastic-hinged storage case.
 4- Road Flares, Road Flares
 20 min RED, no stand, no spike

Aviation / Transportation Safety



SAFETY FLAGS ON DOWEL: Mesh Safety Flag Heavy Duty
These Mesh Flags are made of fluorescent knitted vinyl (KV) mesh material.
Recommended to be used on fast moving vehicles.
These flags will overcome the objections from "whipping," such as cracking, peeling, or fraying.

To Order Specify :
Flag Type: Heavy Duty Mesh or Vinyl
Flag Size: 18"x18" or 24"x24"
Dowel Length: 18", 24", 36" or 48"

Fire Extinguishers




Fire Extinguishers Available in 5 lbs, 10 lbs, 20 lbs and 30 lbs, vehicle brackets available
Buckeye's Monoammonium Phosphate fire extinguishers are designed for use in combating Class "A," "B," and "C" type fires. ABC extinguisher provides the widest and most practical range of extinguisher protection coverage. ANSI/UL 299 and ANSI/UL 711 standards. US Coast Guard approved for Type B:C



Fire Extinguishers Brackets
FE-VB-10t-HD for 10 lb Tall dry chemical, 5.0 in. – 5.25 in.f
FE-VB-20/30-HD for 20 lb and 30 lb dry chemical, 20 lb CO², Class D, 7.0 in. – 8.0 in.

Personal Safety

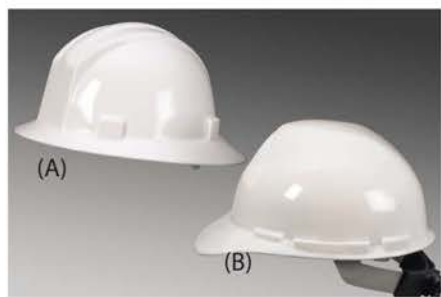

Hard Hats

Hard Hat - Full (A, in photo) Lightweight
Reduces impact of falling objects, but does not provide unlimited protection. 4-Point nylon suspension
Adjustable head strap w/ ratchet head strap.

Hard Hat - Front (B, in photo) Lightweight with.
Superior fit and comfort. Swivelling pivot head strap.
Adjustable pinlock or ratchet-style head strap.
4 or 6-point nylon suspension.

Add Your Logo to Hard Hats



Contact us for Logo, Safety Decals or Certification Stickers from Industrial Decals Co.

Safety Vest



SSV-GN-"size": shown above
Multi-pocket Surveyors Vest, zipper
Green, Med, Large, XL, XXL, XXXL

SSVM-GR-"size" no photo available
Mesh panels in upper front and mid-back
Multi-pocket Surveyors Vest, zipper
Green, Med, Large, XL, XXL, XXXL



SV014: Vest, Fluorescent Soft Mesh with Reflective Yellow
shown with
AB011: Arm Band
Fluorescent Reflective



SSV-OR-"size" shown above
Multi-pocket Surveyors Vest, zipper
Orange, Med, Large, XL, XXL, XXXL



SSVM-OR-"size" shown above
Mesh panels in upper front and mid-back
Multi-pocket Surveyors Vest, zipper
Orange, Med, Large, XL, XXL, XXXL



SV012: Fluorescent yellow mesh with zipper



Meet Our Brands:



Driver Industrial®, 2115 W. Mountain View Rd., Phoenix, AZ 85021
 Tel. 602-424-2500 Fax: 602-424-9777
 Sales@DriverIndustrial.com
 www.DriverIndustrial.com

SafetyWhips® Canada, 677 – 192 St. #107 Surrey, BC V3S 3X1
 tel 604.560.5080 fax 604.560.5090
 SalesCanada@SafetyWhips.com
 www.SafetyWhips.ca



Vehicle Wraps, Graphics & Lettering
 OSHA / MSHA / ANSI Compliant :
 Decals, Signs, and Tags

Email: Sales@DriverIndustrial.com
 www.DriverIndustrial.com



Equipment ID Decals



Vehicle Wraps



Control Panels
 Data Plates
 OEM Decals

Chemical Hazmat



Fire Extinguisher Tags



Bar Coding

OSHA Safety Signs and Decals



Hard Hat Decals

- Company Branding
- Fleet Graphics & Maintenance
- Control Panels / OEM Decals
- Hard Hat Decals
- Complete Equipment & Vehicle Outfitting
- Large Format Printing
- View-thru Reflective Window Decals
- Industrial Equipment Labels
- Dataplates